

Product Description:			
AUO Model Name: T315XW01 VH (QD32HL05 Rev.01)			
Customer Part No/Project Name: LK315T3LF12			
Customer Signature	Date	AUO	Date
		Approved By: Frank Ko	
		Reviewed By: HongJye Hong	
		Prepared By: CT Wu	

Product Specifications

31.5" WXGA Color TFT-LCD Module

Model Name: T315XW01 VH

(QD32HL05 Rev.01)

() Preliminary Specifications

(*) Final Specifications

These specification sheets are the proprietary product of **AUO Optronics Inc. ("AUO")** and include materials protected under copyright of **AUO**. Do not reproduce or cause any third party to reproduce them in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of **AUO**.

The device listed in these technical literature sheets was designed and manufactured for use in OA equipment.

In case of using the device for applications such as control and safety equipment for transportation (aircraft, trains, automobiles, etc.), rescue and security equipment and various safety related equipment which require higher reliability and safety, take into consideration that appropriate measures such as fail-safe functions and redundant system design should be taken.

Do not use the device for equipment that requires an extreme level of reliability, such as aerospace applications, telecommunication equipment (trunk lines), nuclear power control equipment and medical or other equipment for life support.

AUO assumes no responsibility for any damage resulting from the use of the device, which does not comply with the instructions, and the precautions specified in these technical literature sheets.

Contact and consult with an **AUO** sales representative for any questions about this device.

Content List

	Page
1. Application	6
2. Overview	6
3. General Specifications	6
4. Input Terminals	7
5. Absolute Maximum Ratings	11
6. Electrical Characteristics	12
7. Timing Characteristics of LCD module input signals	16
8. Input Signals, Basic Display Colors and Gray Scale of Each Color	18
9. Optical Characteristics	19
10. Display Quality	21
11. Handling Precautions	21
12. Reliability Test Items	22
13. Others (Label & Pallet packing)	23
14. Drawing	25
15. Packing	27
16. Reliability test criteria	31

1. Application

This specification applies to a color TFT-LCD module, QD32HL05

2. Overview

This module is a color active matrix LCD module incorporating amorphous silicon TFT (Thin Film Transistor). It is composed of a color TFT-LCD panel; driver ICs, control circuit and power supply circuit and a backlight unit. Graphics and texts can be displayed on a 1366×3×768 dots panel with 16.7 million colors by using the LVDS (Low Voltage Differential Signaling) interface, 8-bit driving method and supplying +5V DC supply voltage for TFT-LCD panel driving.

The TFT-LCD panel used for this module has fast response time. A low-reflection and higher-color-saturation type color filter is also used for this panel. Therefore, high-brightness and high-contrast image, which is suitable for multimedia use, can be obtained by using this module.

[Features]

- 1) High aperture panel; high brightness
- 2) Brilliant and high contrast image
- 3) High speed response
- 4) WXGA resolution, 16:9
- 5) LVDS interface
- 6) QSV technology
- 7) Wide viewing angle

3. General Specifications

Parameter	Specifications	Unit
Display size	80.04 (31.51") Diagonal	cm
Active area	697.685 (H)×392.256 (V)	mm
Pixel format	1366 (H)×768 (V)	Pixel
	(1 pixel = R+G+B dots)	
Pixel pitch	0.5107(H) × 0.5107 (V)	mm
Pixel configuration	R,G, B vertical stripe	
Display mode	Normally Black	
Unit outline dimensions	760 (W)×450 (H)×48(D)	mm
Thickness	48 max.	mm
Weight	7000 max.	g
Surface treatment	Anti-glare (Haze 13 %) and hard-coating 3H	
Lamp Quantity	16 straight lamps	pcs

4. Input Terminals

4-1. TFT-LCD pin assignment of panel

CN1: FI-X30SSL-HF (JAE) or equivalent


Pin NO.	Symbol	Function	Remark
1	V _{CC}	+5V input	
2	V _{CC}	+5V input	
3	V _{CC}	+5V input	
4	V _{CC}	+5V input	
5	GND	Power Ground	
6	GND	Power Ground	
7	GND	Power Ground	
8	GND	Power Ground	
9	LVDS SELECT	LVDS data mapping Low/Open for Normal (NS), High for JEIDA	Low: 0-0.8 V; High: 2.7-3.3 V; Default NS type.
10	RESERVED	N.C.	
11	GND	Ground	
12	RXIN0-	LVDS data input	
13	RXIN0+	LVDS data input	
14	GND	Ground	
15	RXIN1-	LVDS data input	
16	RXIN1+	LVDS data input	
17	GND	Ground	
18	RXIN2-	LVDS data input	
19	RXIN2+	LVDS data input	
20	GND	Ground	
21	RXCLK-	LVDS clock input	
22	RXCLK+	LVDS clock input	
23	GND	Ground	
24	RXIN3-	LVDS data input	
25	RXIN3+	LVDS data input	
26	GND	Ground	
27	RESERVED	N.C.	
28	NTSC or _PAL_SELECTION	OD table selection	Low/Open for PAL(50Hz) High for NTSC(60Hz)
29	GND	Ground	
30	GND	Ground	

【Note 1】 All GND(ground) pins should be connected together and to V_{CC} which should also be connected to the LCDs metal frame.


【Note 2】 Relation between LVDS signals and actual data shows below section (7-1).

【Note 3】 All V_{CC} (power supply) pins should be connected together.


LVDS OPTION=High(3.3 V)

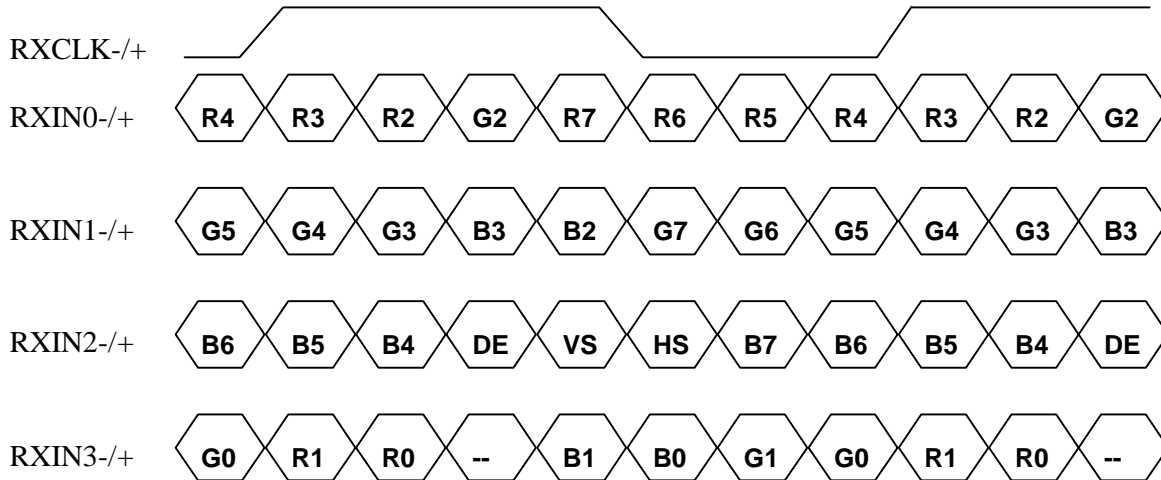

LVDS OPTION=LOW (GND)/ NC

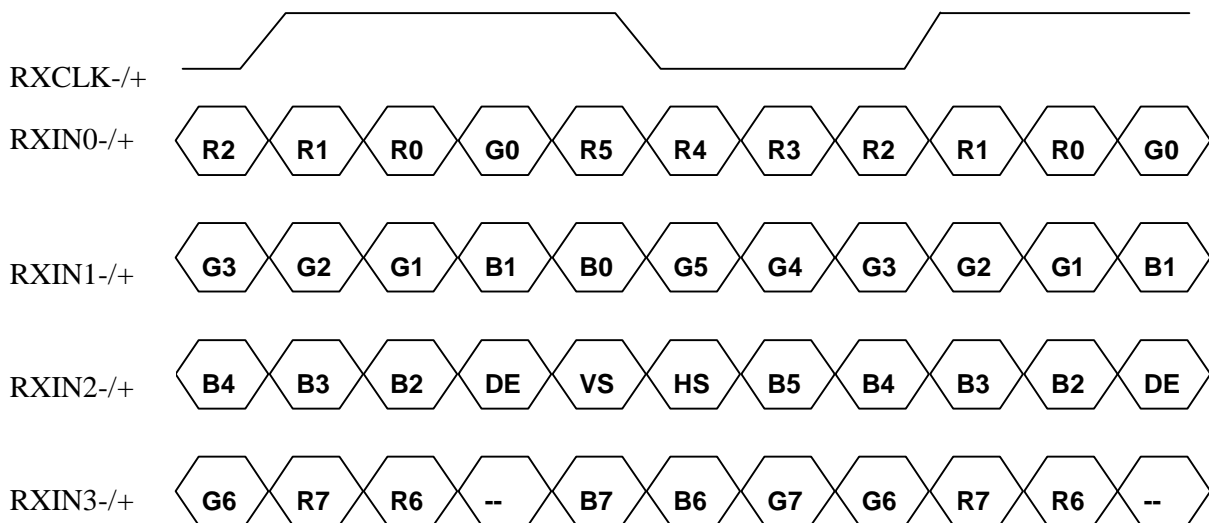

4-2 Interface block diagram

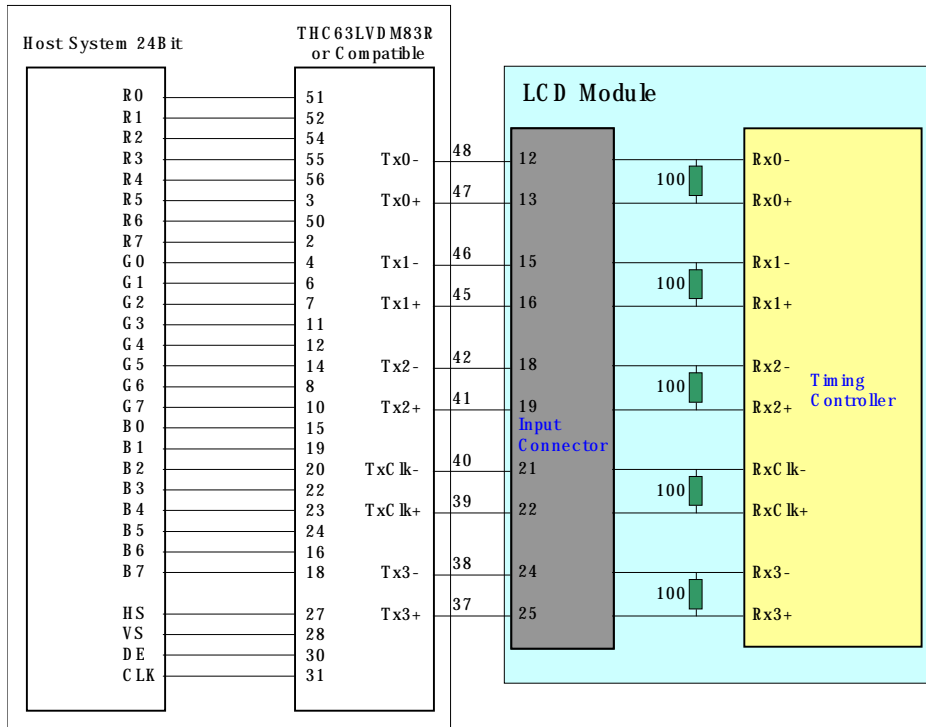

4-3. Backlight driving

4-3-1. Inverter connector

Connector	Type
CN1	S14 B-PH-SM3 TB (JST) or Equivalent
CN2-CN9	SM02(12B)-BHS-1-TB (JST) or Equivalent
CN10	S2B-ZR-SM3A-TF (JST) or Equivalent

4-3-2 Pin assignment of inverter (CN1)

Pin No.	Symbol	Description	Remark
1	V _{DD}	+24V DC	
2	V _{DD}	+24V DC	
3	V _{DD}	+24V DC	
4	V _{DD}	+24V DC	
5	V _{DD}	+24V DC	
6	GND	Ground	
7	GND	Ground	
8	GND	Ground	
9	GND	Ground	
10	GND	Ground	
11	NC	Non Connection	
12	BRTC	Backlight On/OFF signal	On : High, Off : Low
13	BRTI	Luminance controlled by voltage method	Note.1
14	SGND	Signal Ground	

Note.1 Luminance ratio is linearly controllable in the range of the following table.

BRTI Voltage (VBI)	Luminance ratio
0V	20% (Minimum)
3.3V	100% (Maximum)

5. Absolute Maximum Ratings

LCD module

Parameter	Symbol	Condition	Ratings	Unit	Remark
Input Voltage (for control)	VI	Ta=25℃	-0.3 ~ +5.5	V _{DC}	【Note1】
5 V Supply Voltage (for Pannel)	V _{CC}	Ta=25℃	0 ~ +6.0	V _{DC}	
Input Voltage (for inverter)	V _{brt}	Ta=25℃	0 ~ +6.0	V _{DC}	【Note2】
24V supply voltage (for Inverter)	V _{INV}	Ta=25℃	0 ~ 27.5	V _{DC}	
Storage temperature	Tstg	—	-20 ~ +60	℃	【Note3】
Operating temperature (Ambient)	Topa	—	0 ~ +50	℃	

【Note1】 LVDS SELECT, NTSC or PAL SELECTION

【Note2】 BRTC,BRTI

【Note3】 Humidity : 90%RH Max. at Ta≤40℃.

Maximum wet-bulb temperature at 39℃ or less at Ta>40℃.

No condensation.

6. Electrical Characteristics


6-1TFT-LCD panel driving

Ta=25 C

Parameter		Symbol	Min.	Typ.	Max.	Unit	Remark
Vcc	Supply input voltage	Vcc	+4.5	+5	+5.5	V	【Note2】
	Supply input current	ICQ	—	960	1400	mA	【Note3】
	Power description	PD	—	4.8	7.7	W	
	Rush current	Iccs			3.0	A	
	Permissive Input Ripple Voltage	Vrp			120	mV	
Differential input Threshold voltage	High	V _{TH}	—	—	+100	mV	V _{CM} =+1.2V 【Note1】
	Low	V _{TL}	-100	—	—	mV	
LVDS select (High)		V _{IH}	2.7		3.3	V	
LVDS select (Low)		V _{IL}	0		0.8	V	
Input current (High)		I _{OH}	—	—	+/-10	μA	V _I =3.3V
Input current (Low)		I _{OL}	—	—	+/-10	μA	V _I =0V
Terminal resistor		R _T	—	100	—	Ω	Differential input

【Note1】 V_{CM} : Common mode voltage of LVDS driver.

【Note2】 On-off conditions for supply voltage

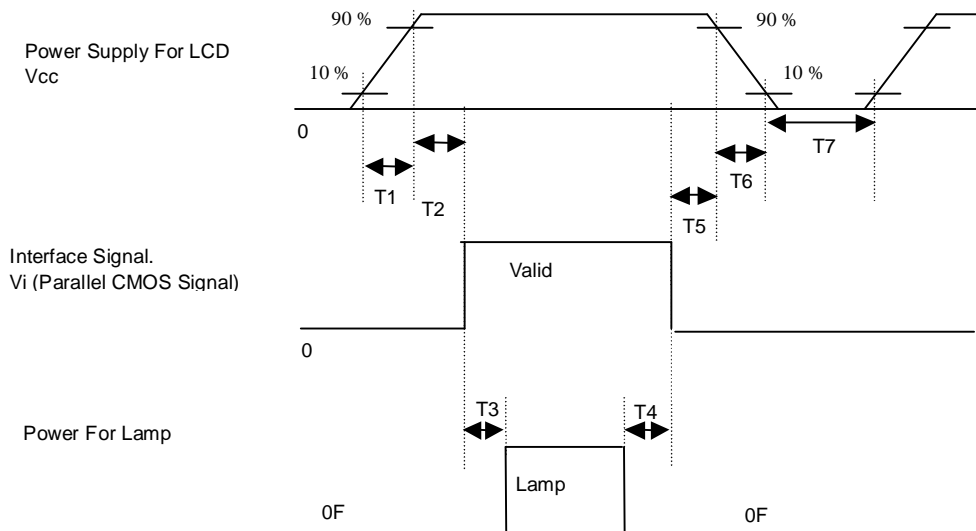


$0 < T1 \leq 10\text{ms}$; $0.5\text{ms} < T2 \leq 50\text{ms}$; $200\text{ms} \leq T3$; $200\text{ms} \leq T4$; $0.5\text{ms} < T5 \leq 50\text{ms}$; $0 < T6 \leq 10\text{ms}$; $400\text{ms} < T7$

V_{cc}-dip conditions

1) $4\text{V} \leq V_{cc} < 4.5\text{V}$
 $t_d \leq 10\text{ms}$


2) $V_{cc} < 4\text{V}$

V_{cc}-dip conditions should also follow the On-off conditions for supply voltage

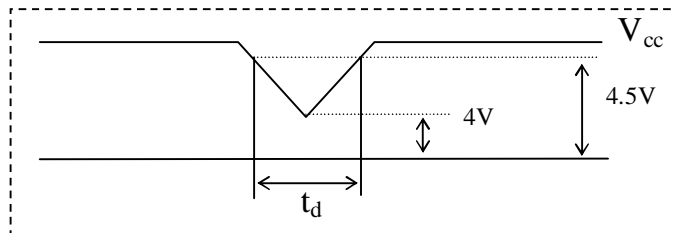


【Note3】

Typical current condition: 2-line vertical stripe pattern (0,255GS). $V_{CC}=+5V$

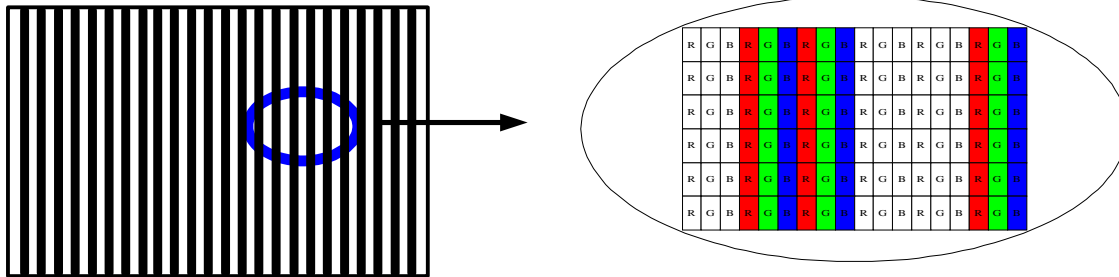

Max current condition: 1x1dot Checker Board Pattern (0, 255GS). $V_{CC}=+5V$

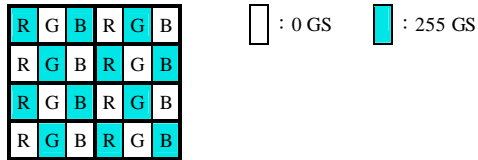


6-2. Backlight driving

The backlight system is a direct-lighting type with 16 CCFT (Cold Cathode Fluorescent Tube).


The characteristics of the lamp are shown in the following table.

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark	
Power Supply Input Voltage	V _{DD}	21.6	24.0	26.4	V	【Note1】	
Power Supply Input Current	I _{DD}	4.1	4.6	5.0	A		
Power Consumption	P _{DD}	-	110.4	132	W	【Note3】	
Lamp current	I _L	4.5	5.0	5.5	mA	【Note2】	
Lamp voltage	V _L	1215	1350	1485	V _{rms}	±10%	
Lamp power consumption by per lamp	P _L	-	6.75	8.17	W		
Ripple Voltage	V _{rf}	-	-	800	mV		
Diming Voltage	V _{Brt}	0	-	3.3	V	Input Impedance:58K	
BRTC(ON / OFF Voltage)	V _{ON}	2.0	3.3	5.0	V	High	
	V _{OFF}	0	-	0.8	V	Low	
Lamp frequency	FL	56	58	60	kHz	【Note4】	
Established starting voltage	V _s	-	-	1700	V _{rms}	Ta=25℃	【Note5】
				1900	V _{rms}	Ta=0℃	
Lamp life time	LL	50000	60000		Hours	I _L <=6.0mA 【Note6】	

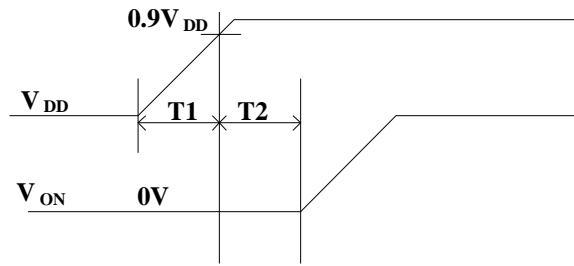【Note1】
1. Power ON sequence:


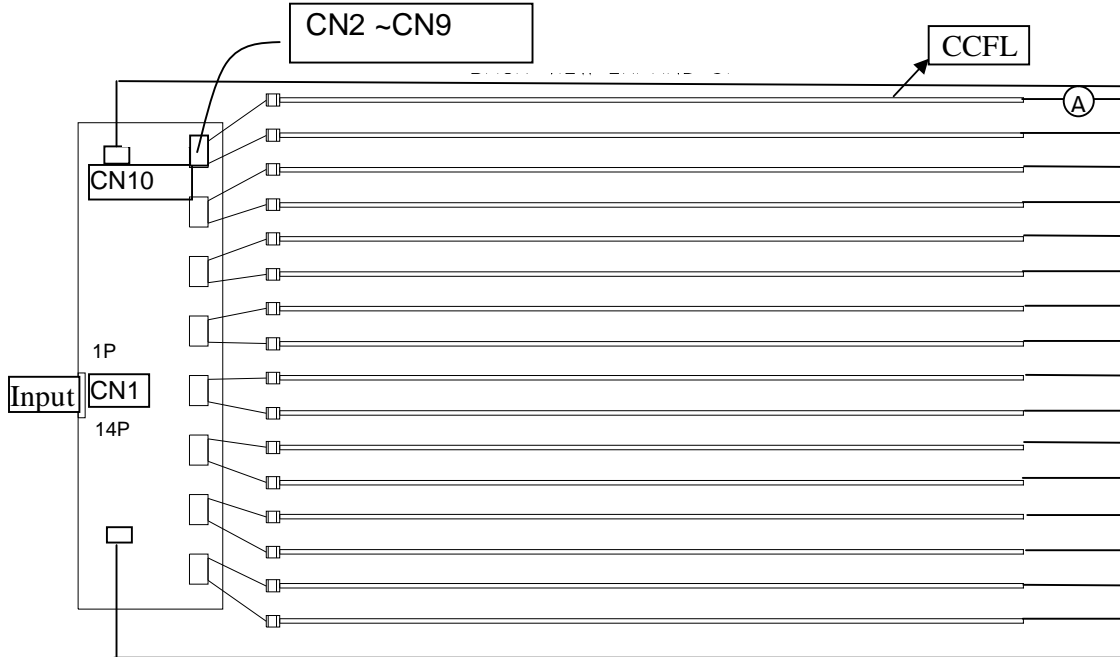
$$4\text{mS} < T1 \leq 20\text{mS}$$

$$2\text{mS} \leq T2$$

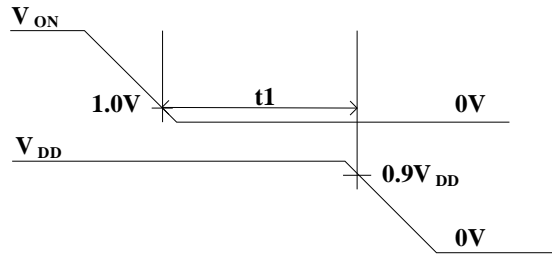2. Power OFF sequence:


$$2\text{mS} \leq t1$$

【Note2】 Lamp current is measured with current meter at low voltage end as shown below.



【Note3】 Calculated Value for reference ($I_{DD} \times V_{DD}$)

【Note4】 Lamp frequency may produce interference with horizontal synchronous frequency, and this may cause beat on the display. Therefore lamp frequency shall be detached as much as possible from the horizontal synchronous frequency and from the harmonics of horizontal synchronous to avoid interference.

【Note5】 The voltage above this value should be applied to the lamp for more than 1 second to start-up. Otherwise the lamp may not be turned on.

【Note6】 Lamp life time is defined as the time when either ① or ② occurs in the continuous operation under the condition of $T_a = 25^{\circ}\text{C}$ and $I_L \leq 6.0\text{mA}_{\text{rms}}$.

- ① Brightness becomes 50 % of the original value under standard condition.
- ② Kick-off voltage at $T_a = 0^{\circ}\text{C}$ exceeds maximum value.

7. Timing characteristics of LCD module input signals

7-1. Timing characteristics

ITIME	Symbol	Min	Typ	Max	Unit	Notes
DCLK	Frequency	F_{CLK}	55	80	85	MHz
	Period	t_{CLK}	18.18	12.5	-	ns
Hsync	Period	t_{HA}	1512	1648	1780	t_{CLK} (A)
	Width-Active	t_{HC}	8	16	-	(C)
	Frequency	f_H	36.38	48.6	52	kHz
Vsync	Period	t_{VA}	774	810	-	t_{HA} (A)
	Width-Active	t_{VC}	2	6	-	(C)
	Frequency	f_V	47	60	63	Hz
Data Enable	Horizontal back porch	t_{HD}	8	80	-	t_{CLK} (D)
	Horizontal front porch	t_{HF}	130	186	-	t_{CLK} (F)
	Horizontal active	t_{HE}	1366	1366	1366	t_{CLK} (E)
	Horizontal blanking	t_{HB}	146	282	-	t_{CLK} (B)
	Vertical back porch	t_{VD}	2	20	-	t_{HA} (D)
	Vertical front porch	t_{VF}	2	16	-	t_{HA} (F)
	Vertical active	t_{VE}	768	768	768	t_{HA} (E)
	Vertical blanking	t_{VB}	6	42	-	t_{HA} (B)


Notes:

1. The performance of electro-optical characteristics may be influenced by variance of the vertical refresh rates.


2. This module is driven by the data enable signal.

The data enable signal should follow Vsync and Hsync of above table.

7-2 Signal Timing Waveform

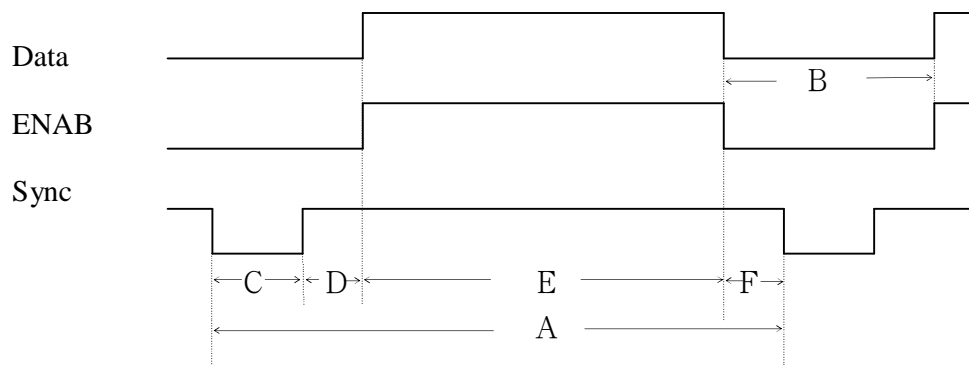

7-3. Input Data Signals and Display Position on the screen

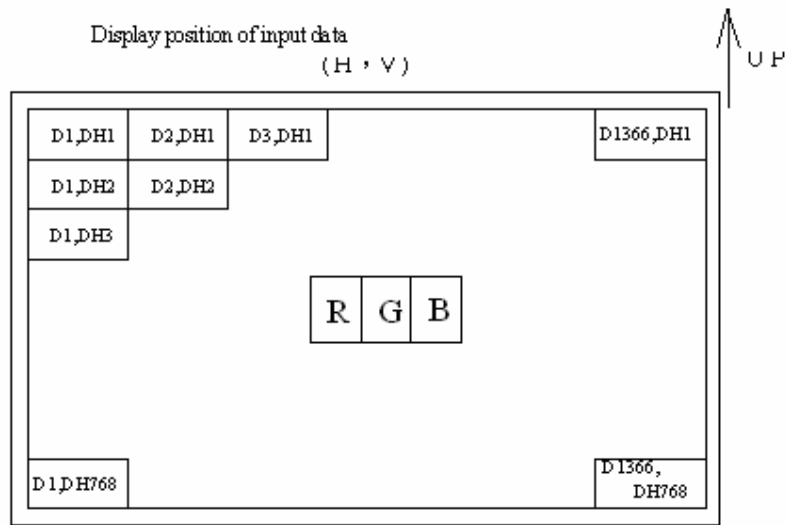

8. Input Signals, Basic Display Colors and Gray Scale of Each Color

	Colors & Gray scale	Data signal																											
		Gray Scale	R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7			
Basic Color	Black	—	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Blue	—	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1		
	Green	—	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0		
	Cyan	—	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
	Red	—	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Magenta	—	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1		
	Yellow	—	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0		
	White	—	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Gray Scale of Red	Black	GS0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	ñ	GS1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Darker	GS2	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	ñ	â	â								â								â										
	ò	â	â								â								â										
	Brighter	GS253	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	ò	GS254	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Red	GS255	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Gray Scale of Green	Black	GS0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	ñ	GS1	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Darker	GS2	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	ñ	â																											
	ò	â																											
	Brighter	GS253	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0		
	ò	GS254	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0		
	Green	GS255	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0		
Gray Scale of Blue	Black	GS0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	ñ	GS1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0		
	Darker	GS2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0		
	ñ	â																											
	ò	â																											
	Brighter	GS253	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1		
	ò	GS254	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1		
	Blue	GS255	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1		

0: Low level voltage, 1: High level voltage

Each basic color can be displayed in 256 gray scales from 8 bit data signals. According to the combination of total 24 bit data signals, the 16,777,216-color display can be achieved on the screen.

9. Optical Characteristics

$T_a=25^{\circ}\text{C}$, $V_{cc}=+5\text{V}$

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing angle	L/R	θ_{21}, θ_{22}	CR>10	80	88	Deg.	【Note1,4】
angle	U	θ_{11}		80	88	Deg.	
range	D	θ_{12}		80	88	Deg.	
Contrast ratio	C R n	$\theta = 0^{\circ}$	900	1200	—		【Note2,4】
Response time	τ		—	TBD	TBD	ms	【Note3,4】
Rise time	τ_r			TBD	TBD	ms	
Fall time	τ_d			TBD	TBD	ms	
Gray to gray response time				8	TBD	ms	
Chromaticity of	Wx		0.247	0.277	0.307		【Note4】
White (CIE 1931)	Wy		0.257	0.287	0.317		
Chromaticity of	Rx		0.611	0.641	0.671		NTSC 72%
Red (CIE 1931)	Ry		0.310	0.340	0.370		
Chromaticity of	Gx		0.254	0.284	0.314		
Green (CIE 1931)	Gy		0.582	0.612	0.642		
Chromaticity of	Bx		0.116	0.146	0.176		
Blue (CIE 1931)	By		0.047	0.077	0.107		
Luminance of white	Y L		400	500		Cd/m^2	$V_{BRTC}=3.3\text{V}$ 【Note4】
White Uniformity	δW (5P)		—	-	1.25		【Note5】
Color Temperature	CT			10500		$^{\circ}\text{K}$	

※ The measurement shall be executed 30 minutes after lighting at rating.(Typical $I_L=6.0$ mA)

The optical characteristics shall be measured in a dark room or equivalent state with the method shown in Fig.3 below.


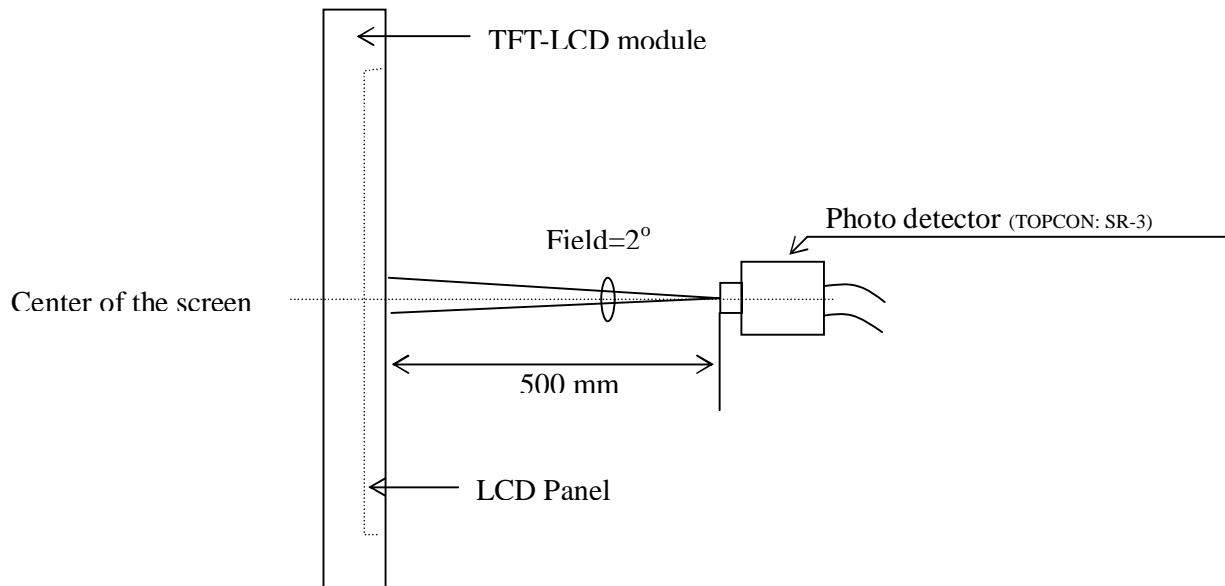


Fig 1. Optical characteristics measurement method

【Note1】 Definitions of viewing angle range:

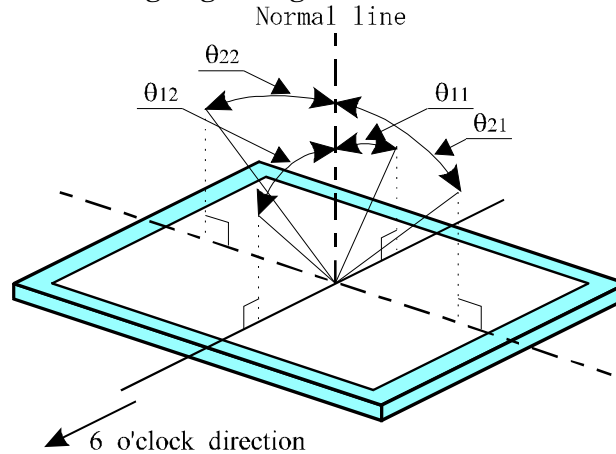


【Note2】 Definition of contrast ratio:

The contrast ratio is defined as the following.

$$\text{Contrast Ratio (CR)} = \frac{\text{Luminance (brightness) with all pixels white}}{\text{Luminance (brightness) with all pixels black}}$$

【Note3】 Definition of response time:

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white" .

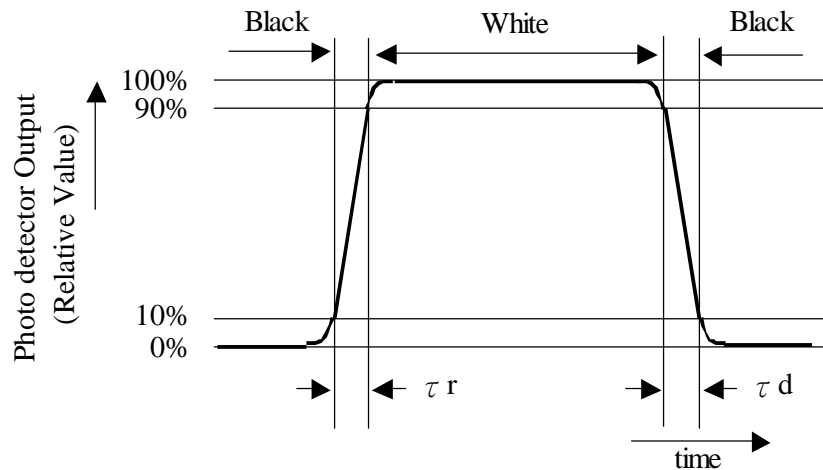


【Note4】 This shall be measured at center of the screen.

Share of module quantity of luminance over 460cd/m²; ≥ 90%

【Note5】 Definition of white uniformity:

White uniformity is defined as the following the number of measurement points within active area, formula are $\delta_w(5)(A \sim E)$. HxV : active area

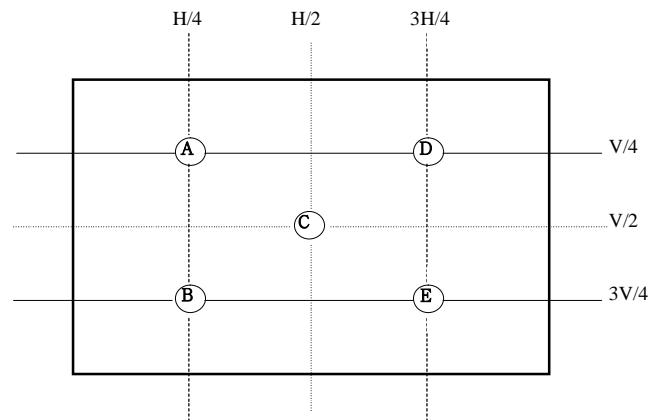

$$\delta_w = \frac{\text{Maximum Luminance (of 5 points measurement)}}{\text{Minimum Luminance (of 5 points measurement)}}$$

10. Display Quality

The display quality of the color TFT-LCD module shall be in compliance with the Incoming Inspection Standard.


11 · Handling Precautions

- a) Be sure to turn off the power supply when inserting or disconnecting the cable.
- b) Be sure to design the cabinet so that the module can be installed without any extra stress such as warp or twist.
- c) Since the front polarizer is easily damaged, pay attention not to scratch it.
- d) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- e) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- f) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface. Handle with care.
- g) Since CMOS LSI is used in this module, take care of static electricity and injure the human earth when handling.
- h) Observe all other precautionary requirements in handling components.
- i) This module has its circuitry PCBs on the rear side and should be handled carefully in order not to be stressed.
- j) Laminated film is attached to the module surface to prevent it from being scratched. Peel the film off slowly just before the use with strict attention to electrostatic charges. Ionized air shall be blown over during the action. Blow off the 'dust' on the polarizer by using an ionized nitrogen gun, etc...

12. Reliability test items


No.	Test item	Conditions
1	High temperature storage test	Ta = 60°C, 500h
2	Low temperature storage test	Ta = -25°C, 500h
3	High temperature & High humidity operation test	Ta = 40°C, 95 %RH, 500h
4	High temperature operation test	Ta = 50°C, 500h
5	Low temperature operation test	Ta = 0°C, 500h
6	Vibration test (non-operating)	Frequency: 10~500Hz, 1.0G, 1Hr/each axis
7	Shock test (Non- operating)	Gravity: 100G Pulse width: 2ms, half sine wave Direction : ±X,±Y,±Z Once for each direction.
8	ESD	Contact-op: ±8kv, Contact-nop: ±10kv, Air-op: ±15kv, Air-nop: ±20kv, (Contact area is limited on metal bezel) C: 150PF R: 330Ω
9	Thermal cycle	Ta = -20, 1h ~ 60°C, 1h, 100 cycles
10	High temperature operation test 2	Ta =60°C, 200h 【Note1】

【Note1】 Image sticking pattern (black pattern with white block matrix inside, white block size equals to one-seventh active area) shown as following:


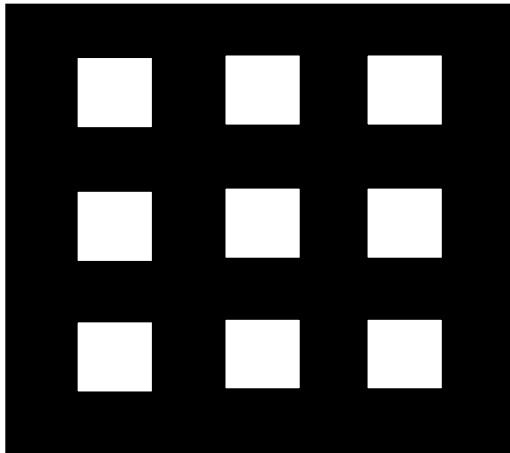


13 · Others

1) Lot No. Label:

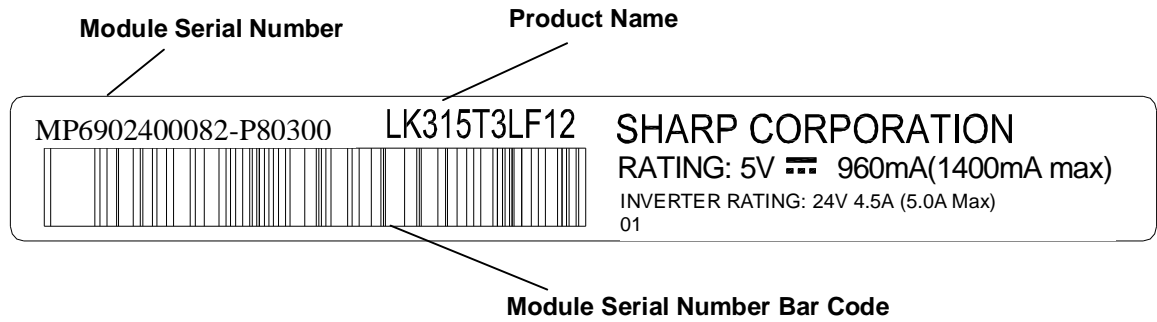

2) Packing Label: 2 packing labels was attached on Carton shown as following.

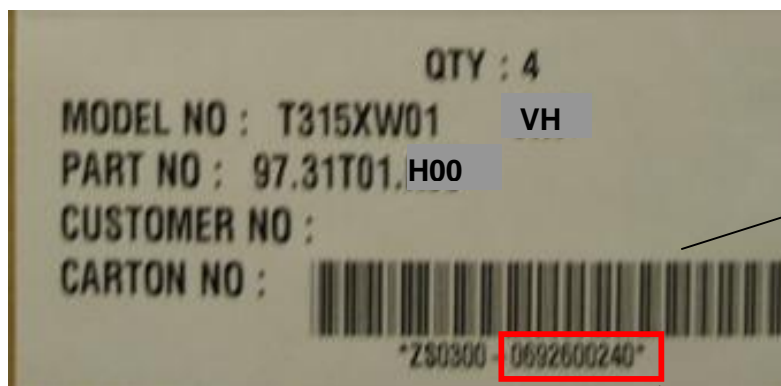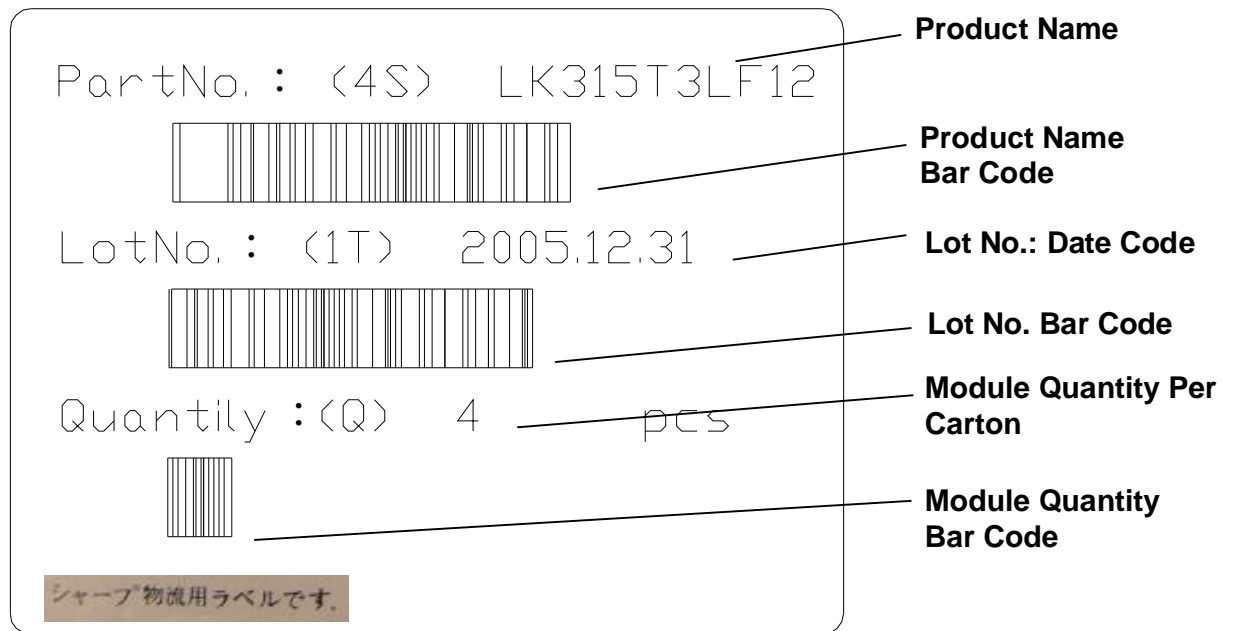

Carton No. Bar Code

Carton No.

Digital 1-2 : Year (06 = 2006)

Digital 3 : Month (1,2,3,4,5,6,7,8,9,A,B,C)

Digital 4-5: Day.

Digital 6-10 : Carton Sequential Number.

3) Pallet

By air transportation, there are 2-layer of cartons stacking on one pallet;

By ocean transportation, there are 3-layer of cartons stacking on one pallet.


For both air- and ocean- transportation, each layer has 6 cartons.

4) Maximum layer of carton 3-layer.**Notes:**


- 1) Adjusting volume has been set optimally before shipment, so do not change any adjusted value. If adjusted value is changed, the specification may not be satisfied.
- 2) Disassembling the module can cause permanent damage and should be strictly avoided.
- 3) Please be careful since image retention may occur when a fixed pattern is displayed for a long time.
- 4) If any problem occurs in relation to the description of this specification, it shall be resolved through discussion with spirit of cooperation.

14. Drawing

Front View

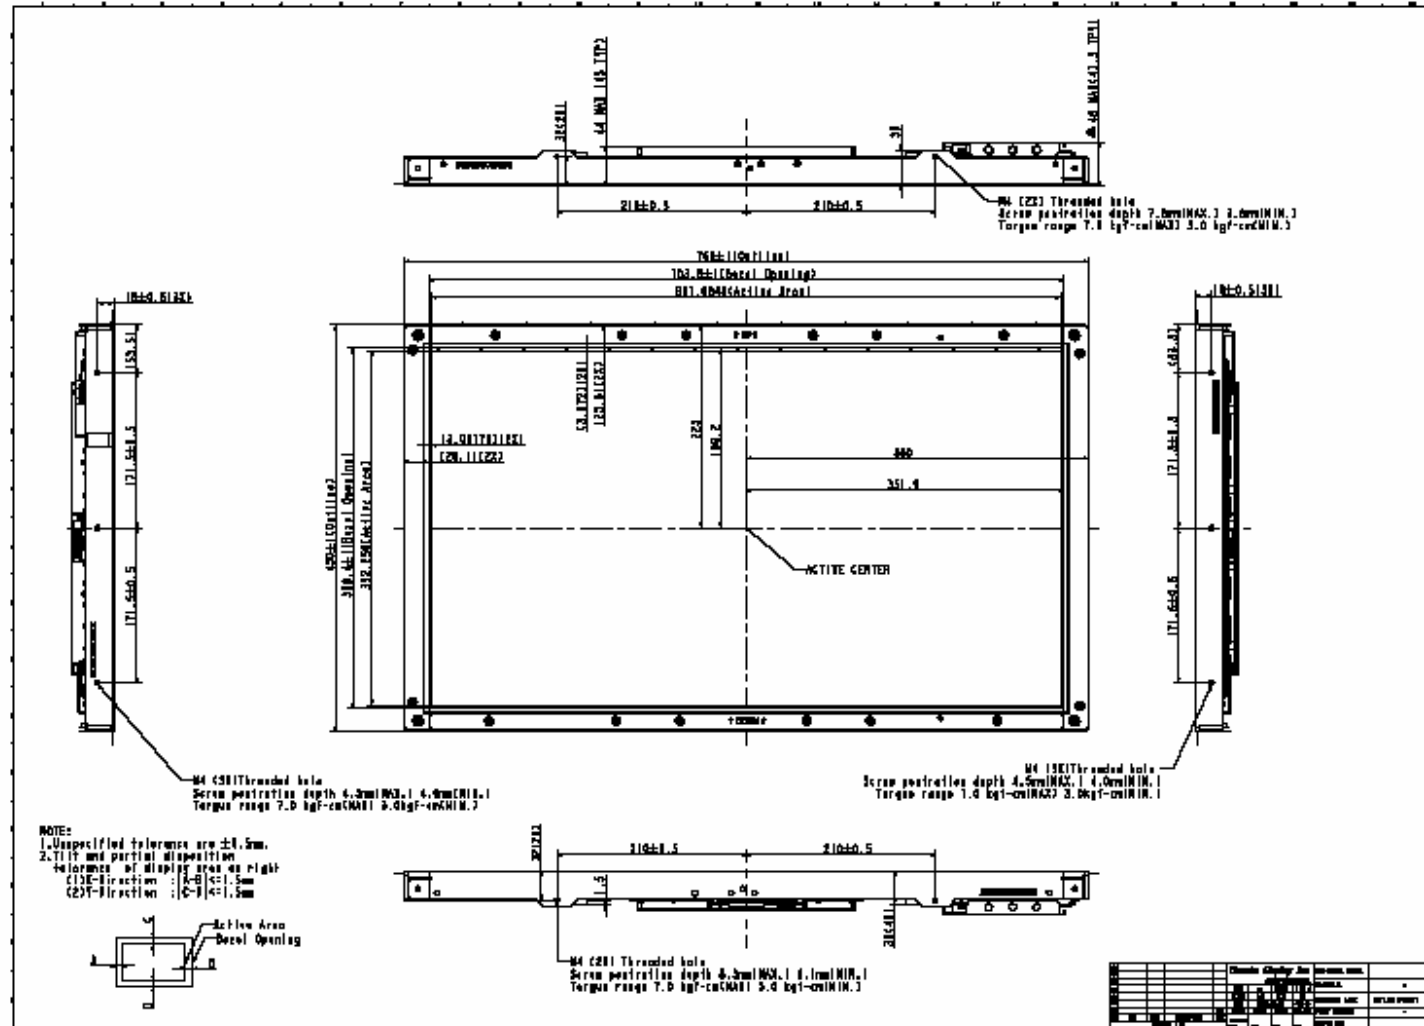


Back View

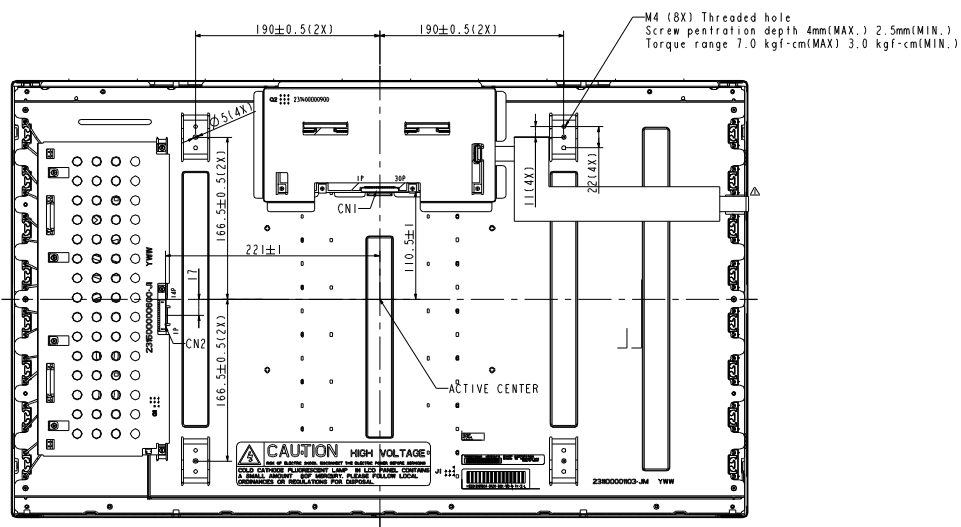


NOTE:
1. CN1: The Interface Connector is F1-X30SSL-HF (JAE)
2. CN2: The Connector of Inverter is SI4B-PH-SW3 (JST)

AUO		ORIGINAL MODEL	V22
DATE	2006.1.12	MATERIAL	4
DATE	2006.1.12	DRAWING NAME	OUTLINE_V22 (JEM)
DATE	2006.1.12	FAST NUMBER	-
DATE	2006.1.12	REVISION	1


15-1 Packing: By air transportation (1 of 2)

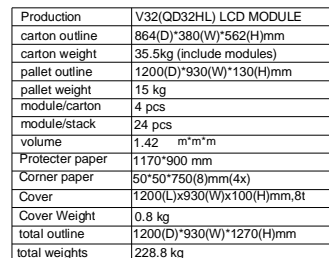


Packing: By air transportation (2 of 2)

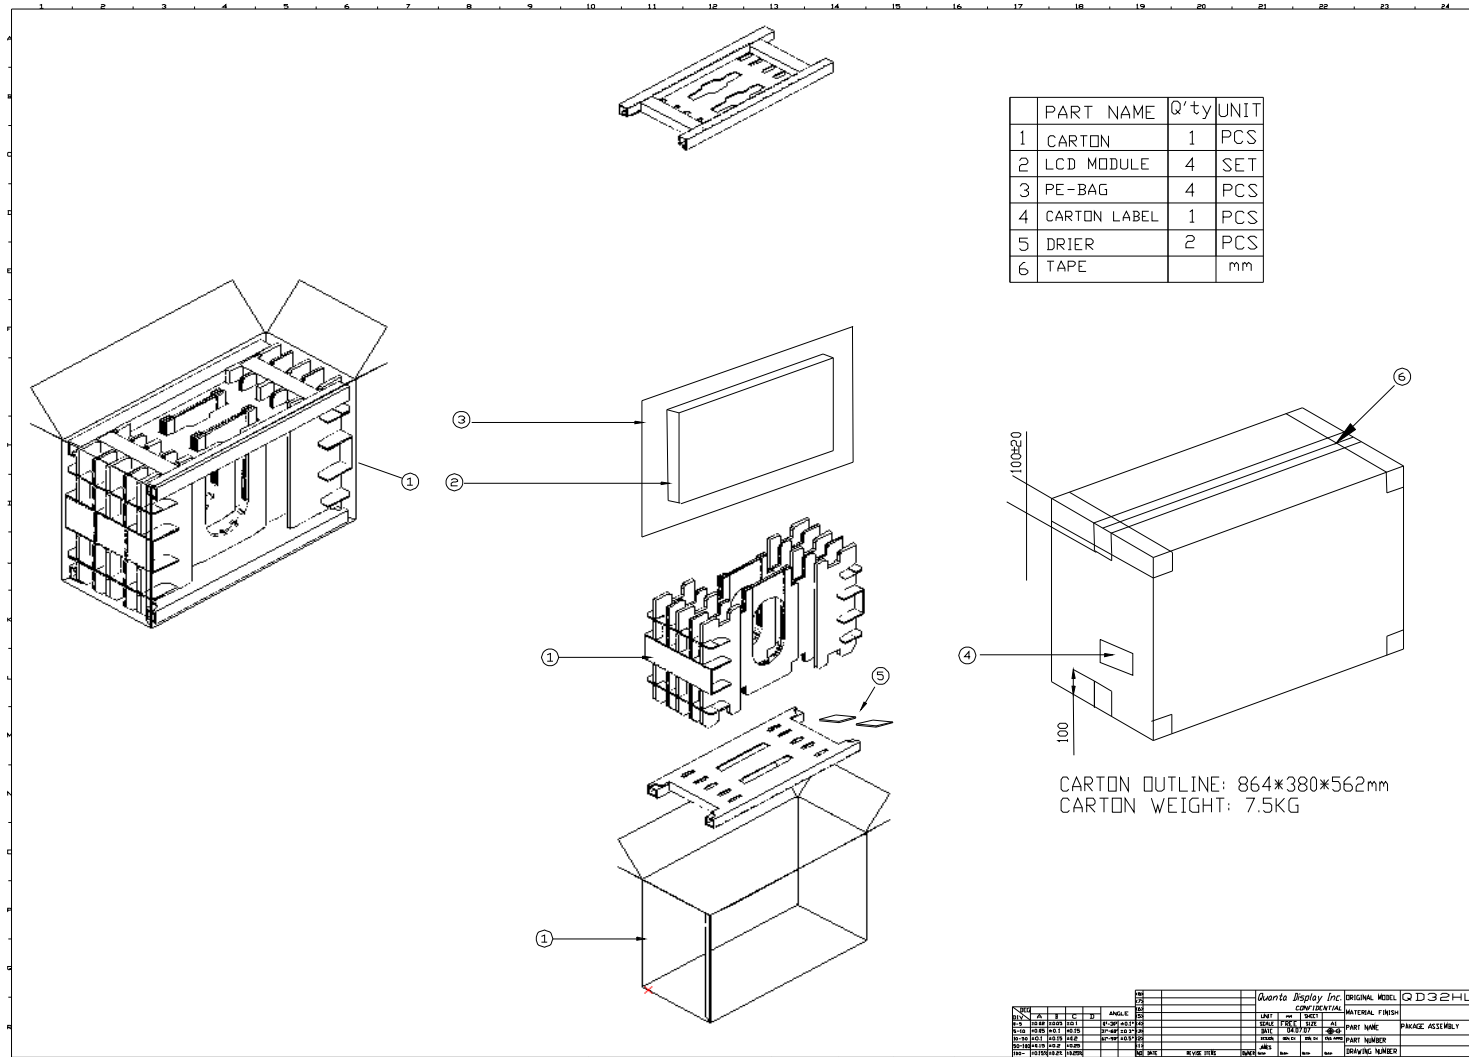

15-2 Packing: By ocean transportation (1 of 2)

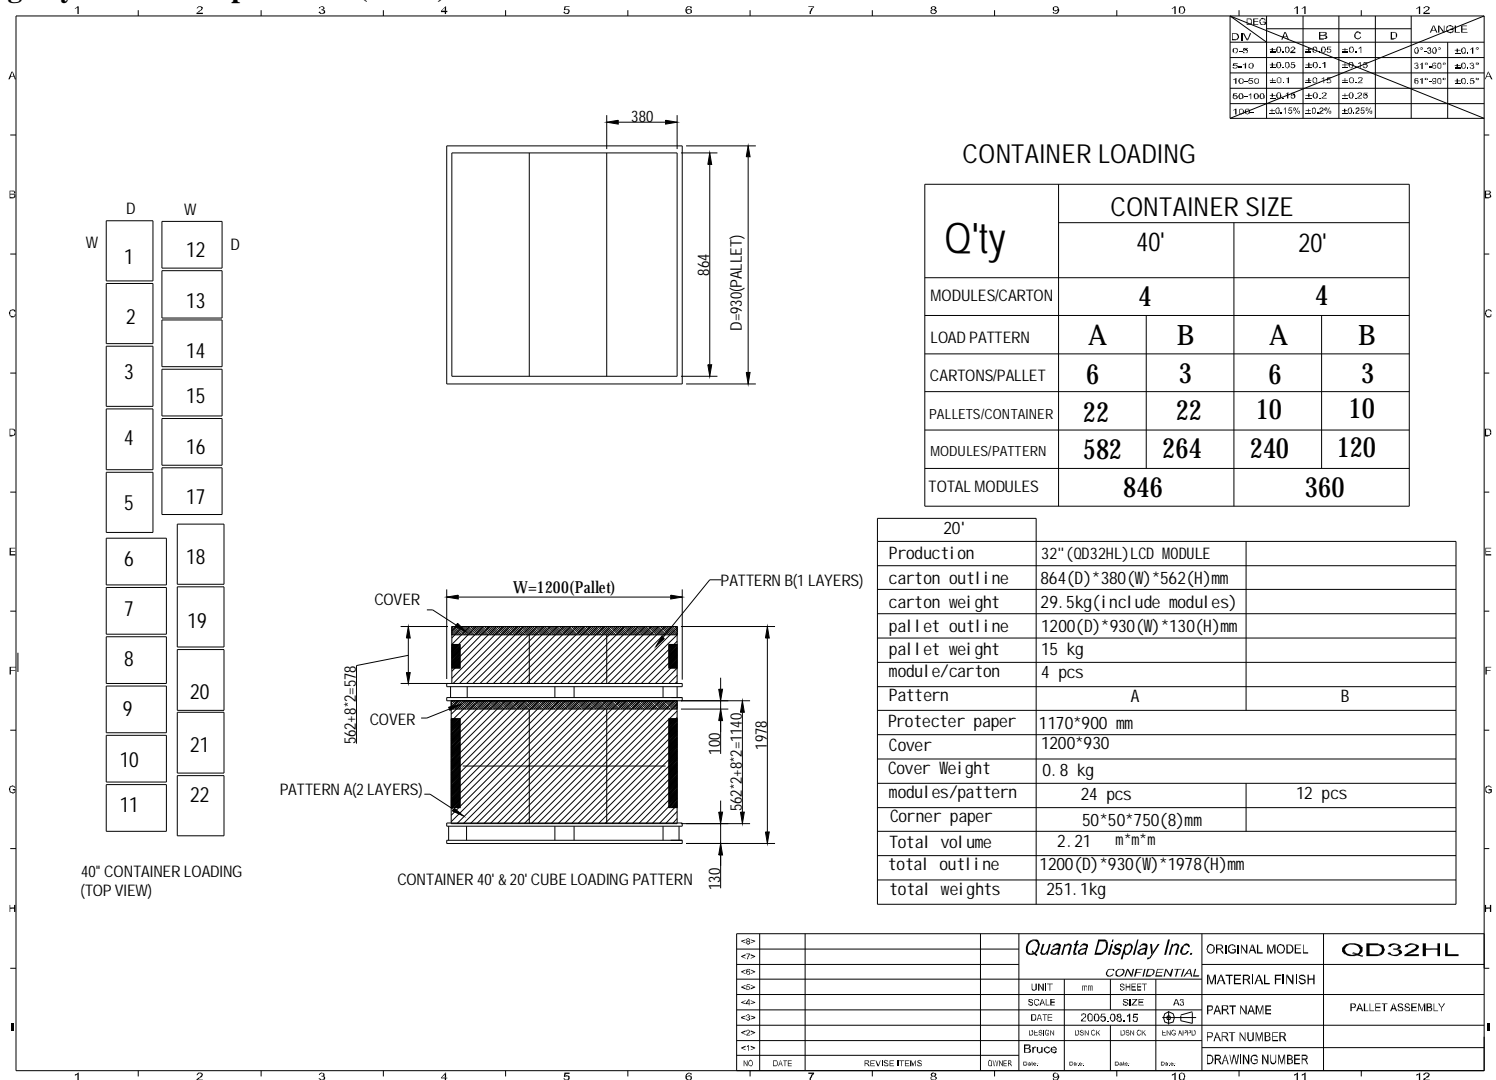

Packing: By ocean transportation (2 of 2)

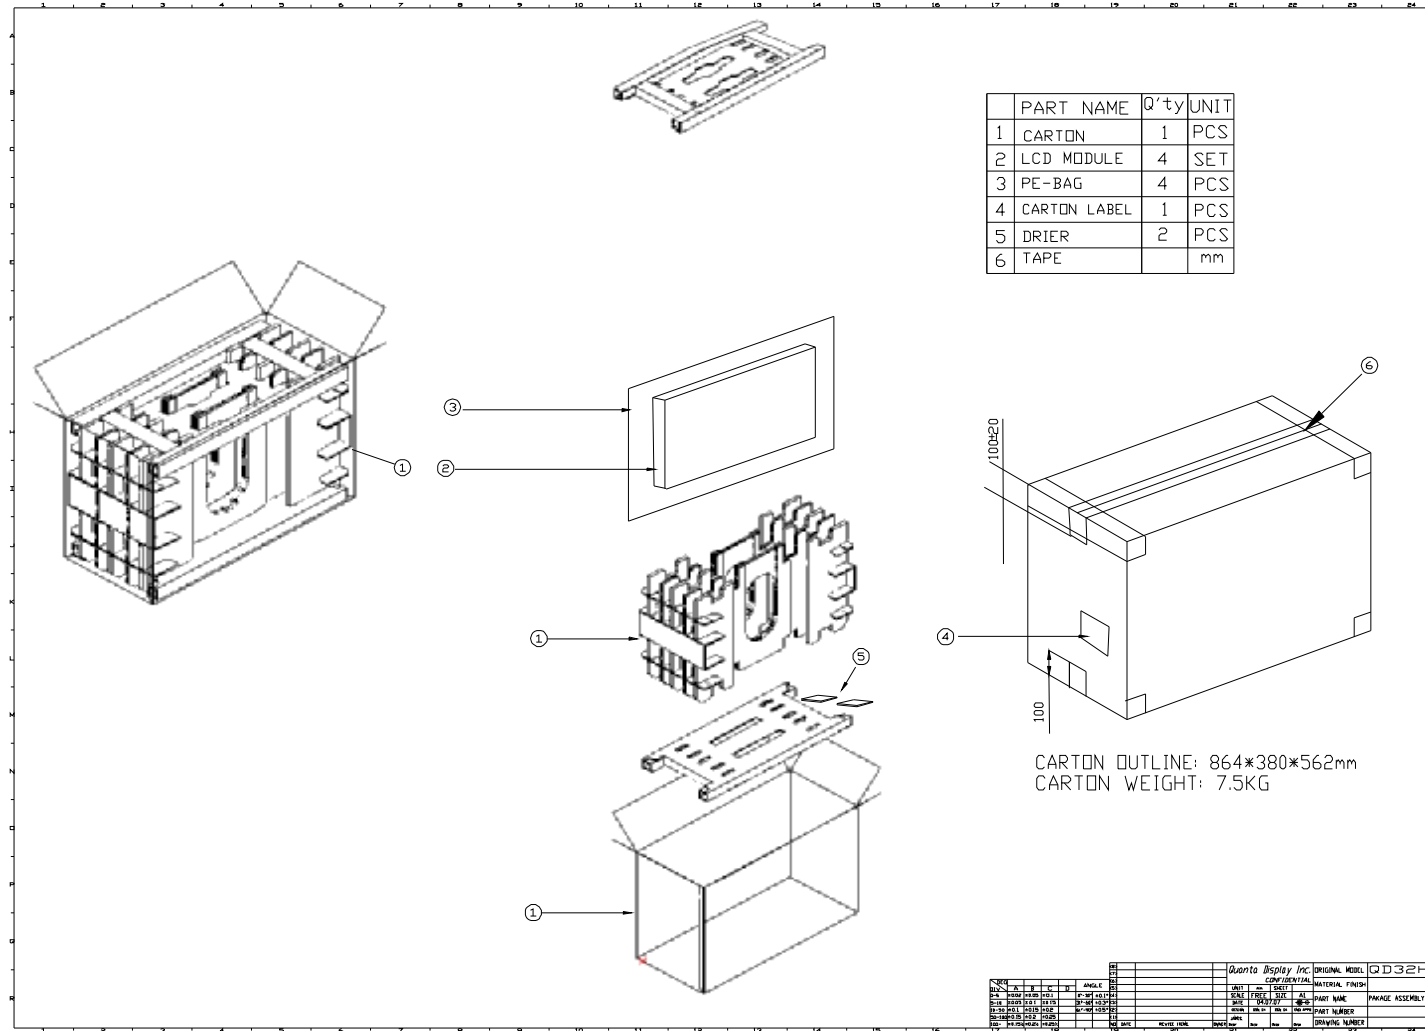

16. Reliability test criteria

No.	Test item	Conditions	Judge Criteria
1	High temperature storage test	Ta = 60°C, 500h	There is no fatal defect for the performance of the LCD module inspected by the inspection method specified in Doc.NO. QD32HL05-01-IIS
2	Low temperature storage test	Ta = -25°C, 500h	There is no fatal defect for the performance of the LCD module inspected by the inspection method specified in Doc.NO. QD32HL05-01-IIS
3	High temperature & High humidity operation test	Ta = 40°C, 95 %RH, 500h	There is no fatal defect for the performance of the LCD module inspected by the inspection method specified in Doc.NO. QD32HL05-01-IIS
4	High temperature operation test	Ta = 50°C, 500h	There is no fatal defect for the performance of the LCD module inspected by the inspection method specified in Doc.NO. QD32HL05-01-IIS
5	Low temperature operation test	Ta = 0°C, 500h	There is no fatal defect for the performance of the LCD module inspected by the inspection method specified in Doc.NO. QD32HL05-01-IIS
6	Vibration test (non-operating)	Frequency: 10~500Hz, 1.0G, 1Hr/each axis	There is no fatal defect for the performance of the LCD module inspected by the inspection method specified in Doc.NO. QD32HL05-01-IIS Active area must be inside of the bezel opening.
7	Shock test (Non- operating)	Gravity: 100G Pulse width: 2ms, half sine wave Direction : ±X,±Y,±Z Once for each direction.	There is no fatal defect for the performance of the LCD module inspected by the inspection method specified in Doc.NO. QD32HL05-01-IIS Active area must be inside of the bezel opening.
8	ESD	Contact-op: ±8kv, Contact-nop: ±10kv, Air-op: ±15kv, Air-nop: ±20kv, (Contact area is limited on metal bezel) C: 150PF, R: 330Ω	There is no fatal defect for the performance of the LCD module inspected by the inspection method specified in Doc.NO. QD32HL05-01-IIS

9	Thermal cycle	Ta = -20, 1h ~ 60°C, 1h, 100 cycles	There is no fatal defect for the performance of the LCD module inspected by the inspection method specified in Doc.NO. QD32HL05-01-IIS
10	High temperature operation test 2	Ta = 60°C, 200h [Note1] To check linear simi that occur boundary between white and black pattern.	Cannot see any simi through the 10% ND filter at any gray scale at 60 degC. Tentative criteria until the end of Feb: Cannot see any simi through the 5% ND filter at 60 degC and through the 10% ND filter at 25 degC at any gray scale.

【Note1】 Image sticking pattern shown as following:

